

## TMA LED DELUX 2L



### Type of luminaire

Innovative LED luminaire designed for general lighting for offices, computer halls, meeting rooms, schools and hospitals. The luminaire is extremely energy efficient and can replace standard lighting solutions made with fluorescent fixtures with T5 4x14W.

### Key advantages

- high energy efficiency
- quick pay-off for the initial investments (ROI)
- long life
- excellent glare protection and no LED spots
- comfort and uniformity of the light output

### Mounting type

The luminaire is designed for mounting in standard recessed ceilings with M600. Optionally the luminaire can be also mounted in plasterboard ceiling or as ceiling mounted.

### Application

With glare to even below 17, TMA LED DELUX 2L is excellent for offices, computer halls, banks, meeting rooms, conference halls, etc.

### Optical system

The LED luminaire is with double parabolic optical system designed especially for LEDs source of light. The optics is produced from highly efficient anodized aluminum in combination with a dedicated opal diffuser. For this optical system, ELUX has a registered EU design. The result is a LED luminaire with excellent comfort and efficiency.

### Electrical connection

The luminaire is equipped with automatic push-in connector. Options with connectors Wieland, Wago and Ensto are also possible.

### Warranty

The operational life of the LED modules used is minimum 50,000 h (L80/B10). The warranty of the luminaire is 5 years.

## Technical Specifications\*

\*All specifications are for Philips components.

### PRODUCT REVIEW

Technology	LED
Dimmable	No
Type	Integrated LED
Mount	Recessed
Control gear type	Electronic
Housing material	Steel
Lumen maintenance L70/B50	70 000h
Lumen maintenance L80/B10	60 000h
Photo biological Risk Group	0
Luminaire efficacy (lm/W)	>120
SDCM	3
Fixture Luminous Flux (lm)	3300
Glare control	<17
Color temperature (K)	4000
IP	40
IK	07

### GENERAL DATA

Ordering No	1110040110310301020407001
Product name	TMA LED DELUX 2L
General applications	Offices, Meeting halls
Sales pack quantity	1
Operating temperature range (°C)	25
Housing color	White RAL 9016

### ELECTRICAL DATA

Luminaire Input Power (W)	27.5
Inrush duration (µs)	280
Drive current (mA)	
Inrush current (A)	21
Max luminaires per 10A C Breaker	24
Max luminaires per 13A C breaker	32
Max luminaires per 16A C Breaker	40
Max luminaires per 20A C breaker	49
Max luminaires per 10A B breaker	15
Max luminaires per 13A B breaker	19
Max luminaires per 16A B breaker	100% ≤ 24
Max luminaires per 20A B breaker	30
CRI	>80
Electrical protection	Class I
Glow wire test (°C)	850
Lamp energy label (class)	A++



reserves the rights to further improve the listed luminaires.

Nominal input voltage	220...240
Nominal frequency (Hz)	50...60


#### PHYSICAL DATA

Lamp included	YES
Included lamp	Integrated LED
Nominal product height (mm)	50
Nominal product width (mm)	600
Nominal product length (mm)	600
Weight (kg)	4
Louvre finish	Gloss
Louvre material	Aluminium 99% reflectivity
Reflector material	Aluminium

#### PACKAGING

Single packaging type	Carton
Packaging outer length (cm)	62
Packaging outer width (cm)	62
Packaging outer height (cm)	6
Single package volume (dm <sup>3</sup> )	23,1
Single product gross weight (kg)	4,2
Single packaging weight (kg)	0,2

#### PHOTOMETRY

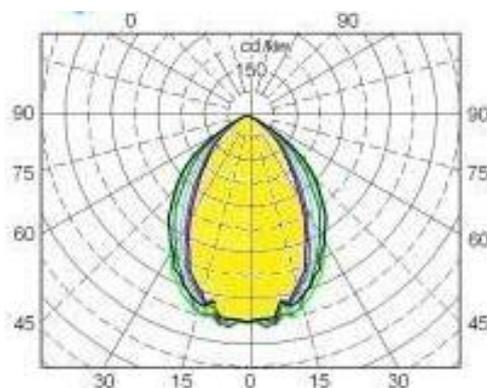

#### TECHNICAL DRAWINGS

